
## satori®


## SATORI TW29DN-B-8

Preliminary data





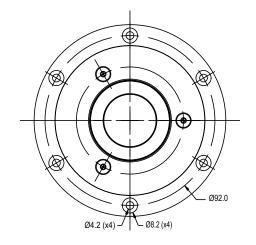

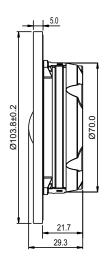


## **FEATURES**

- Large surround dome for increased acoustic output.
- Dual balanced compression chamber for improved dynamics.
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift.
- Two part aluminium faceplate with integrated mechanical decoupling.
- High saturation neodymium motor system with T-shaped pole piece for lower distortion.
- Non-reflective cast aluminium chamber with optimized damping for improved dynamics.
- Shallow flow optimized magnet structure for optimum coupling to rear chamber.
- CCAW voice coil for low moving mass.
- Long life silver lead wires.
- Low resonance frequency for extended range.

## Specs:

| Nominal Impedance          | 8 Ω                 | Free air resonance, Fs     | 650 Hz  |
|----------------------------|---------------------|----------------------------|---------|
| DC resistance, Re          | $6.2~\Omega$        | Sensitivity (2.83 V / 1 m) | 93 dB   |
| Voice coil inductance, Le  | 0.04 mH             | Mechanical Q-factor, Qms   | 1.61    |
| Effective piston area, Sd  | 9.6 cm <sup>2</sup> | Electrical Q-factor, Qes   | 0.65    |
| Voice coil diameter        | 29 mm               | Total Q-factor, Qts        | 0.46    |
| Voice coil height          | 2.0 mm              | Force factor, BI           | 4.1 Tm  |
| Air gap height             | 2.5 mm              | Rated power handling*      | 80 W    |
| Linear coil travel (p-p)   | 0.5 mm              | Magnetic flux density      | 1.5 T   |
| Moving mass incl. air, Mms | 0.43 g              | Magnet weight              | 0.10 kg |
|                            |                     | Net weight                 | 0.39 kg |

<sup>\*</sup> IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

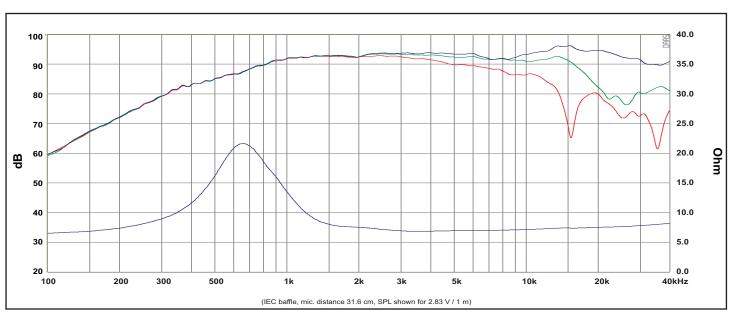

(Red): 60° off-axis

Response Curve : - (Blue) : on axis REV.0 (22.03.2018)