


Tweeter

GRT175A

• Article no. 1381637


Frequency response (0° & 30°), Impedance curve

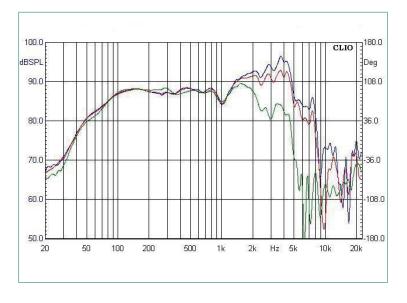

Technical specifications

Frequency range	Hz
Nominal impedance	6 Ω
Dome	Foil
Surround material	Foil
Basket material	Aluminium
Magnet material	Neodym
Voice coil diameter	-
Voice coil former	Aluminium
Outside diameter	174 mm
Build in hole diameter	156 mm
Build in depth	19,5 mm
SPL (1W/1M)	96

Mechanical drawing



Thiele and Small parameters

	Value	Symbol
fs	-	Hz
VAS	-	L
QMS	-	-
QES	-	-
QTS	-	-
Re	-	Ω
Sd	-	cm ²
Cms	-	247 μm/N
Mms	-	g
LE	-	VC/mH
BL	-	(NA) (F/I)

