
## TW29BN-B

## satori®



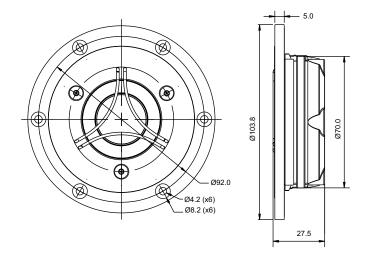


## **FEATURES**

- Beryllium dome for non-resonant high frequency extension
- Two part aluminium faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion
- Non-reflective cast aluminium chamber with optimized damping for improved dynamics
- Shallow flow optimized magnet structure for optimum coupling to rear chamber
- CCAW voice coil for low moving mass
- · Long life silver lead wires
- Low resonance frequency for extended range

## Specs:

Spect.			
Nominal Impedance	4 Ω	Free air resonance, Fs	700 Hz
DC resistance, Re	$3.0~\Omega$	Sensitivity (2.83 V / 1 m)	95 dB
Voice coil inductance, Le	0.02 mH	Mechanical Q-factor, Qms	2.1
Effective piston area, Sd	9.6 cm <sup>2</sup>	Electrical Q-factor, Qes	0.60
Voice coil diameter	29 mm	Total Q-factor, Qts	0.46
Voice coil height	2.0 mm	Force factor, BI	3.1 Tm
Air gap height	2.5 mm	Rated power handling*	80 W
Linear coil travel (p-p)	0.5 mm	Magnetic flux density	1.5 T
Moving mass incl. air, Mr	ns 0.46 g	Magnet weight	0.11 kg
		Net weight	0.41 kg

<sup>\*</sup> IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

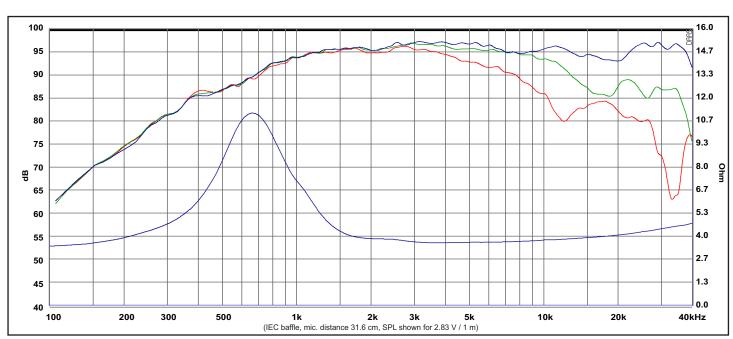

Response Curve : REV.0 (22.04.2017)

----- (Green) : 30 off-axis

----- (Red) : 60° off-axis