



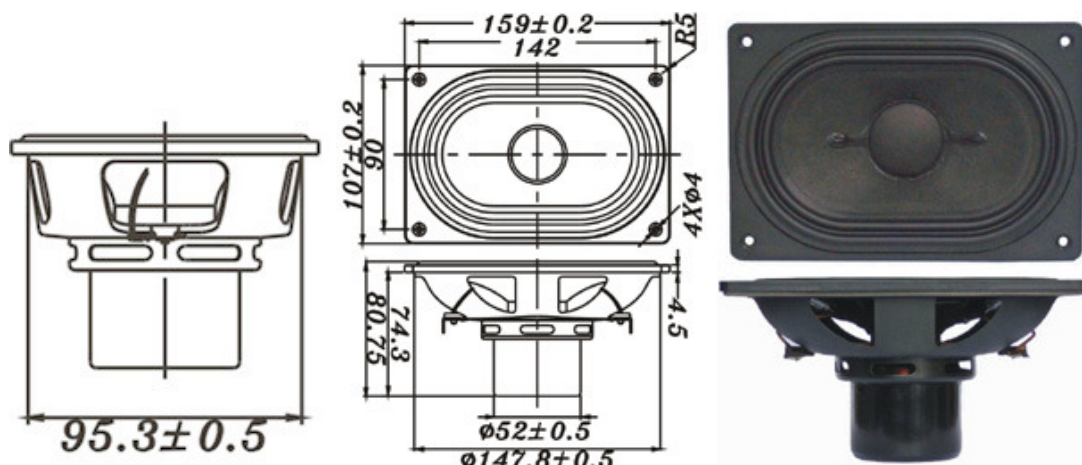

- LONG THROW HIGH POWER LOADING DESIGN
- AIR DRY PAPER CONE WITH WIDE RANGE TEMPERATURE RUBBER SURROUND
- NYLON GF COMPOSITE BASKET
- INTENDED FOR SLIM OR FLAT SUBWOOFER SPEAKER BOX DESIGN, VENTED POLE PIECE
- GOOD FOR HOME THEATER, HI-FI, CAR, MULTI-MEDIA APPLICATION
- NEODYMIUM DESIGN, MAGNETIC SHIELDED

4*6" PAPER SUBWOOFER

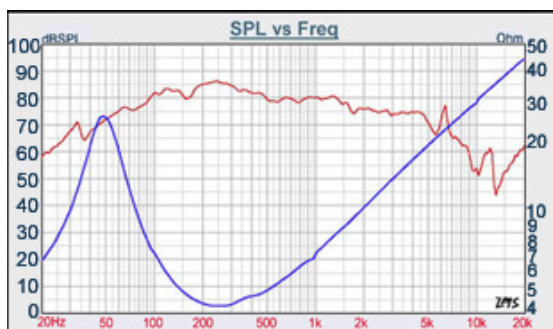

DIAPHRAGM MTL	Air Dry Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 W
DCR IMPEDANCE	3.4 W
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	50-5K Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	32 mm
AIR GAP HEIGHT	5 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	7.12 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	17.96 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	621.575 μMN^{-1}
EFFEC. PISTON AREA	0.00935 M^2
Levc	0.159 mH
Zo	24 ohm
X-max	6.75 mm
Vas	7.72 Litr.
Qts	0.31
Qms	2.34
Qes	0.36



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com