


F SERIES


W6-2313

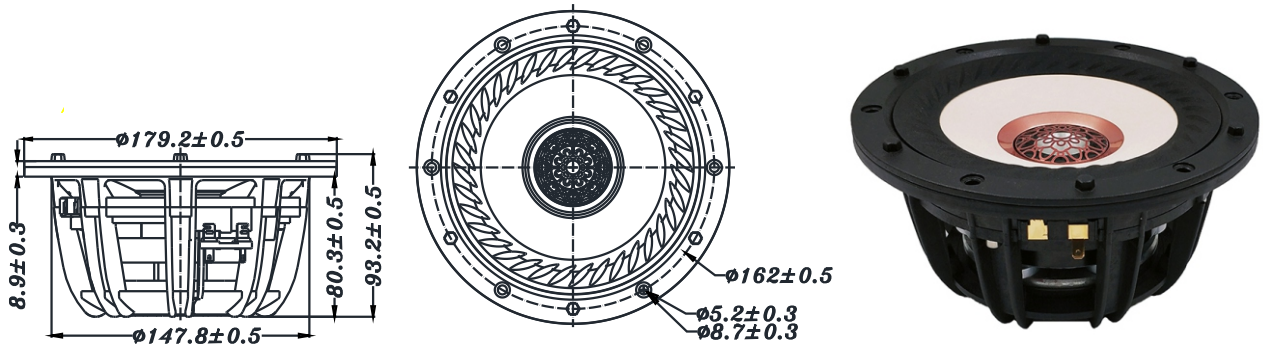

- 25mm TWEETER WITH 6.5" WOOFER COAXIAL SPEAKER DESIGN.
- UNDERHUNG MOTOR DESIGN WITH NEODYMIUM MAGNET TO REACH LOW THD (2nd, 3rd HARMONIC DISTORTION).
- BAMBOO FIBER PAPER CONE WITH DURABLE RUBBER SURROUND.
- ALUMINUM / MAGNESIUM ALLOY MEMBRANE WITH BACK CHAMBERS DESIGN TO PERFORM 800 UP TO 40KHZ.

6.5" PAPER COAXIAL FULL RANGE

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1M	87 dB
FREQUENCY RESPONSE	50Hz-40 K Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	44.43 mm
AIR GAP HEIGHT	14 mm
RATED POWER INPUT	45 W
MAXIMUM POWER INPUT	90 W
FORCE FACTOR, BL	8.41 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	24.95 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	389.52 μMN ⁻¹
EFFECTIVE PISTON AREA	0.0014 M ²
Levc	0.020 mH
Zo	40 Ω
Xmax	4 mm
Vas	10.84 Litr
Qts	0.38
Qms	6.02
Qes	0.41

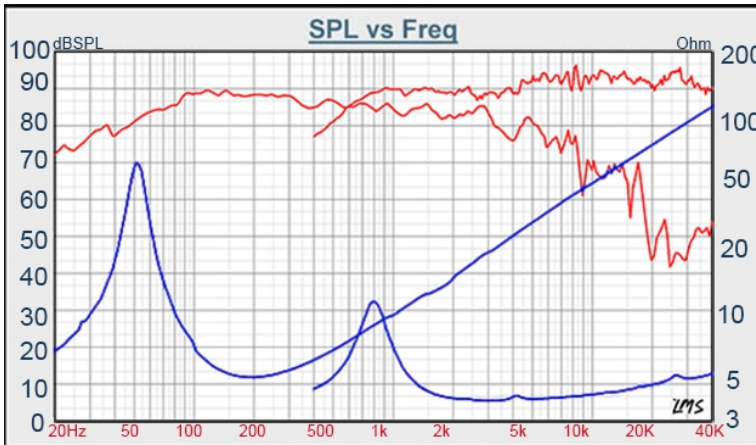

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com